

Catch Basins

Catch Basin Type 1-L WSDOT B-5.40-02

Reinforcing

- ASTM / WSDOT requirements
- All components
- #3 grade 60 reinforcing

Riser Sections

- Available in 2", 4", 6" & 12"
- Lift holes provided in all risers and must be grouted up from both inside and outside to assure watertight structure

Reducing Top Slab

 Standard unit is designed for frame and grate to be placed on top.

Precast Base


- The unit is provided with 25 inch diameter knockouts on all four sides leaving minimum wall thickness of 2 inches
- Lift holes provided in all risers and must be grouted up from both inside and outside to assure watertight structure

Weights

•	Base Unit	2,480 lbs
•	6 inch Reducing Top	430 lbs
•	12 inch Riser Section.	537 lbs
•	6 inch Riser	280 lbs

Conformity Standards

- Washington State APWA / WSDOT Standard Specifications
- WSDOT B-1a

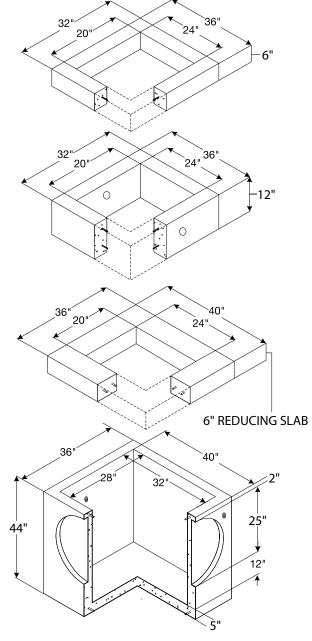

Note: Drawings not to scale

www.shopeconcrete.com

1-800-422-7560 [TOLL FREE]



