



Manhole Products

48" Precast Concrete Dry Well
WSDOT B-20.20-02

Grade Adjustment Rings Available

- 2", 3", 4", 6"

Hole or Knock Out Dimensions

- Maximum hole size is 36 inches
- 8 inches of minimum distance between holes
- 2 inch diameter lifting holes provided
- Cored, cast-in and custom block-out/knock-outs available

Conformity Standards

- ASTM C478 manhole
- Washington State APWA / WSDOT Standard


Options Available

- 2' Concentric cone (shown)
- Flat slab top when specified
- 18", 2' & 3' offset cones


Section Specifications

Height	Section	Base
36"	2,612 LBS	3,612 LBS
48"	3,489 LBS	4,489 LBS
60"	4,365 LBS	5,365 LBS

Base Slab	Cone
1,698 LBS	1,930 LBS

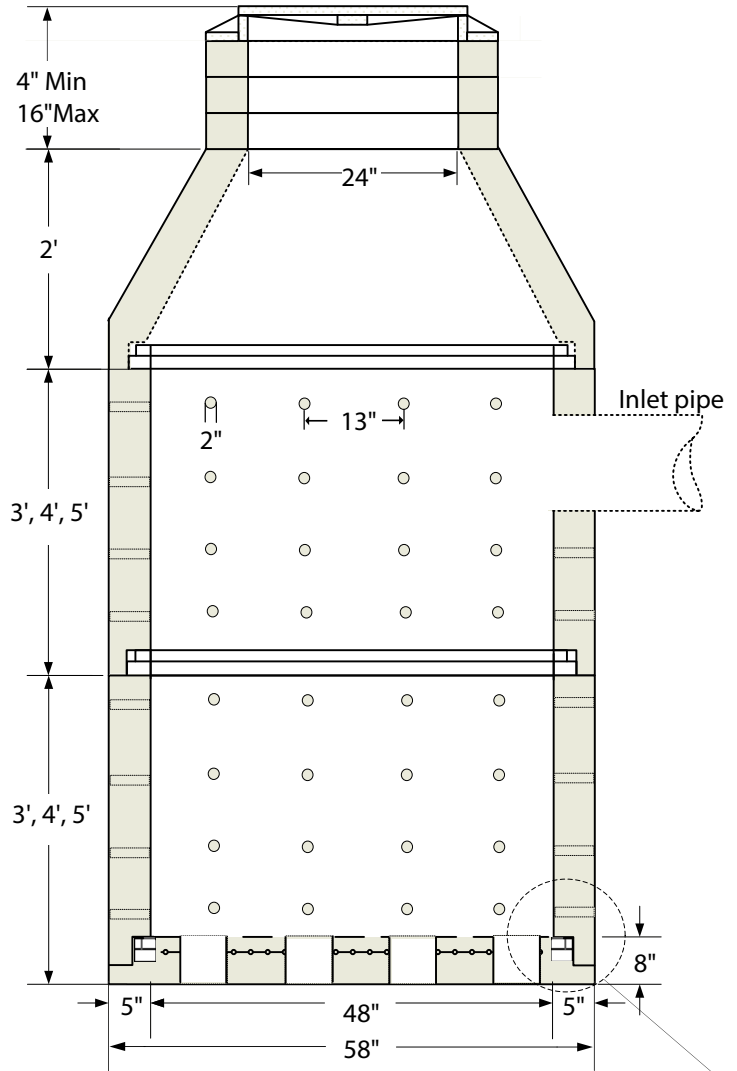


Base Slab Plan View

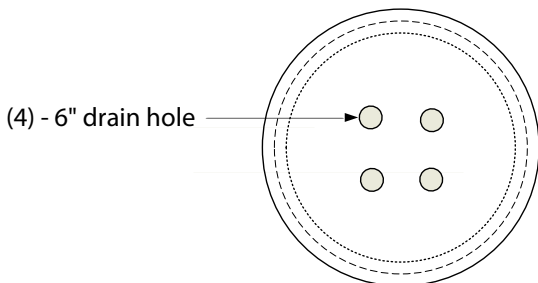


(4) - 6" drain hole

Gasket Shown Uncompressed



1PC GASKET PROFILE



Note: drawings not to scale



Shope Concrete, LLC
1618 East Main Avenue
Puyallup, WA 98372-3142

(253) 848-1551
Fax Line 1 (253) 845-0292
Fax Line 2 (253) 864-6172

1-800-422-7560 [TOLL FREE]
www.shopeconcrete.com