



Manhole Products

48" Precast Concrete Dry Well
WSDOT B-20.20-02

Grade Adjustment Rings Available

- 2", 3", 4", 6"

Hole or Knock Out Dimensions

- Maximum hole size is 36 inches
- 8 inches of minimum distance between holes
- 2 inch diameter lifting holes provided
- Cored, cast-in and custom block-out/knock-outs available

Conformity Standards

- ASTM C478 manhole
- Washington State APWA / WSDOT Standard


Options Available

- 2' Concentric cone (shown)
- Flat slab top when specified
- 18", 2' & 3' offset cones


Section Specifications

Height	Section	Base
36"	2,612 LBS	3,612 LBS
48"	3,489 LBS	4,489 LBS
60"	4,365 LBS	5,365 LBS


Base Slab	Cone
1,698 LBS	1,930 LBS

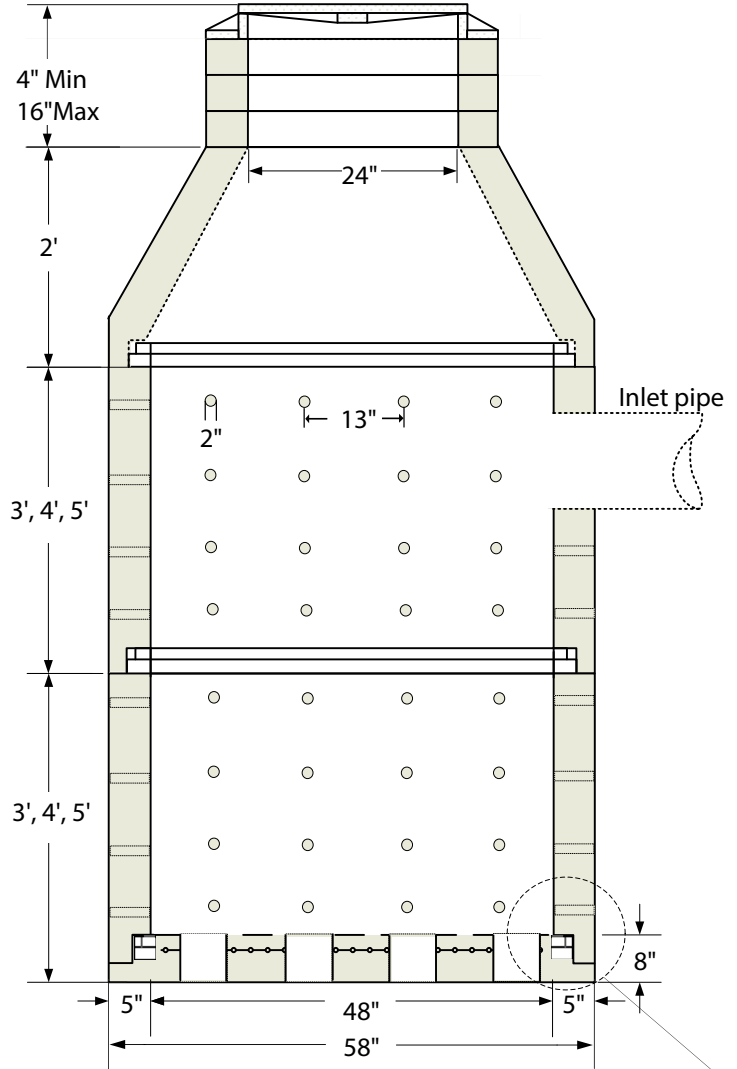

Base Slab Plan View

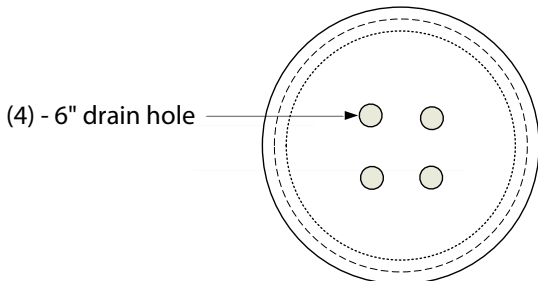


(4) - 6" drain hole

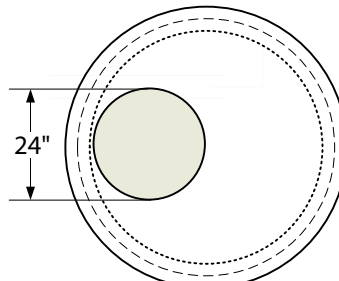

24"

Gasket Shown Uncompressed

1PC
GASKET
PROFILE



Note: Drawings not to scale

www.shopeconcrete.com

1-800-422-7560 [TOLL FREE]



Shope Concrete, LLC
1618 East Main Avenue
Puyallup, WA 98372-3142

(253) 848-1551
Fax Line 1 (253) 845-0292
Fax Line 2 (253) 864-6172

