



Manhole Products

84" Type 207b Maintenance Hole
City of Seattle Standard Plan

Grade Adjustment Rings Available

- 2", 3", 4", 6"

Hole or Knock Out Dimensions

- Maximum hole size is 72 inches
- 12 inches of minimum distance between holes
- 3 inch diameter lifting holes provided
- Cored, cast-in and custom block-out/knock-outs available

Conformity Standards


- ASTM C478 Manhole
- ASTM C443 rubber gasket joint
- ASTM D4101 & 232A/B polypropylene steps and ladders

Options Available


- Offset flat-top square access opening
- Specialized coatings
- Kor-N-Seal boots
- Cored holes
- 1' thru 10' Polypropylene ladders

Section Specifications

Height	Section	Base Slab
12"	2,534 LBS	7,846 LBS
24"	5,125 LBS	
36"	7,716 LBS	
48"	10,308 LBS	Flat Top
60"	12,899 LBS	8,397 LBS
72"	15,490 LBS	
84"	18,081 LBS	
96"	20,665 LBS	

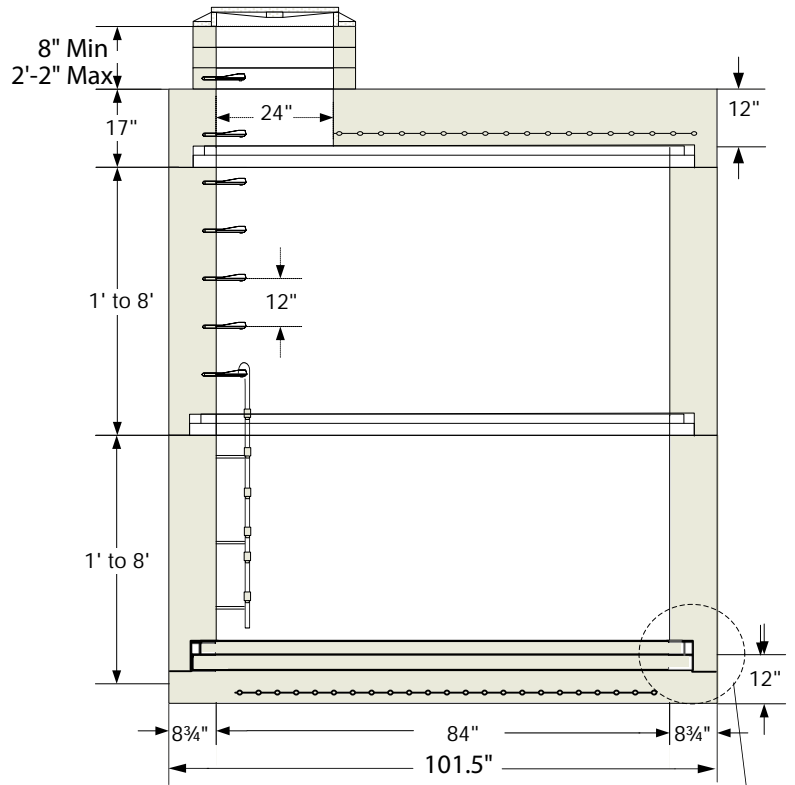

Top Slab Plan View Gasket Shown Uncompressed

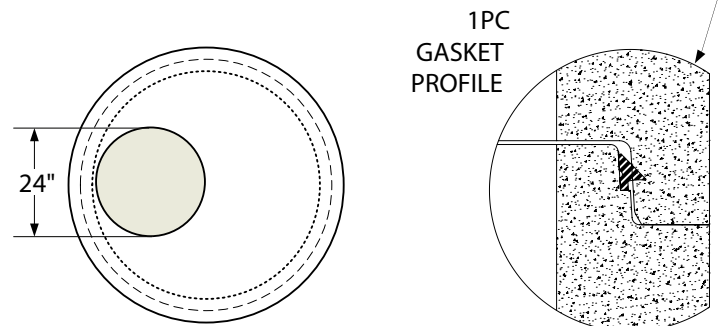

Note: Drawings are not to scale.



Shope Concrete, LLC
1618 East Main Avenue
Puyallup, WA 98372-3142

(253) 848-1551
Fax Line 1 (253) 845-0292
Fax Line 2 (253) 864-6172

1-800-422-7560 [TOLL FREE]
www.shopeconcrete.com